

**Part Number Search**

Enter a part number for fast access to your product.



**Your Quote Request**

Items in Quote: 0

[Go to Quote Request](#)


**Field Attachable Connectors**

> [eCat Home](#) > [Automation Products](#) > [Connectors and Cordsets](#) > [Profibus Products](#) > [Field Attachable Connectors](#)


**Part Number: MA9D00-32**

[Go to Specifications](#)

[Download Files](#)

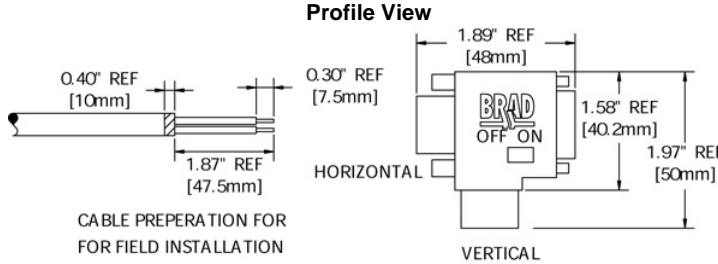

**Face View**



**Color Rotation**

- 1 - NOT USED    4 - NOT USED    7 - NOT USED
- 2 - NOT USED    5 - NOT USED    8 - GREEN (BUS-A)
- 3 - RED (BUS-B)    6 - NOT USED    9 - NOT USED

If you would like a price quote for this part, indicate the quantity for this part and click "Add to Quote Request."

Quantity:

**ATTRIBUTES SELECTED**

Style : Male 9-Pin D-Sub, ABS housing  
Connector Configuration : straight or right angle cable entrance

**DOWNLOAD FILES**

**Profile View**

[DSUB HV FA.dxf](#)

**Face View**

[DSUB 9P Face View.dxf](#)

**Color Rotation**

[DSUB Profibus Color Rotation.dxf](#)

**SPECIFICATIONS**

**Mechanical**

Housing Material - ABS  
Terminating Resistor - Yes, internally switch selectable

**Electrical**

Voltage Rating - 30V  
Current - 4A

**Environmental**

Protection - IP20  
Ambient Operating Temperature - -13 to 185 degF (125 to 85 degC)